



IMV VIBRATION
TEST SYSTEMS

A series

Air-cooled Vibration Test Systems

A74/EM6HAM

A74/EM8HAM

A



A-series is the “new standard” in vibration testing, with a solid test performance. A-series increases the relative excitation force and has a displacement of 76.2 mmp-p (3 inch stroke) *1 which gives good balance between specification of velocity, acceleration and displacement. It also provides a maximum of 3.5 m/s shock velocity testing, which responds to the demand in lithium battery testing. Rapid creation of a test from a set of pre-defined templates conforming to most international test standards. Simply select the standard required to generate the main test settings.

*1) Only for A30, A45, A65, A74

1. Improvement of performance

Expansion of test cases and responses to high spec. tests allow the A-series to meet a wide range of testing needs.

- Improvement in excitation force
- Standard 76.2 mmp-p displacement
- Expansion in frequency range
- High velocity shock test


2. User friendly and secure

Greater security and functionality with improved energy savings.

3. User first principle

Intuitive interface guides the operator for easy use.

Comparison of consumed power per excitation force

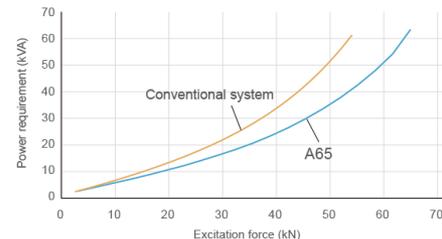

IMV CORPORATION





**IMV VIBRATION
TEST SYSTEMS**

A series

Air-cooled Vibration Test Systems

A74/EM6HAM A74/EM8HAM



System Specification			
System Model		A74/EM6HAM	A74/EM8HAM
Frequency Range (Hz)		0-2,600 ^{*4}	0-2,600 ^{*4}
Rated Force	Sine (kN)	74	74
	Random (kN rms) ^{*1}	74	74
	Shock (kN)	148	180
	High Velocity Shock (kN) ^{*5}	120	160
Maximum Acc.	Sine (m/s ²)	1,000	1,000
	Random (m/s ² rms)	630	630
	Shock (m/s ²)	2,000	2,000
	High Velocity Shock (m/s ² peak) ^{*5}	1,621	2,000
Maximum Vel.	Sine (m/s)	2.0	2.0
	Shock (m/s peak)	2.5	2.5
	High Velocity Shock (m/s peak) ^{*5}	3.5	3.5
Maximum Disp.	Sine (mmp-p)	76.2	76.2
	High Velocity Shock (mmp-p)	76.2	76.2
Maximum Travel (mmp-p)		82	82
Maximum Load (kg)		1,000	1,000
Power Requirements (kVA) ^{*2}		100	100
Breaker Capacity (A) ^{*3}		250	250

Vibration Generator (A74)	
Armature Mass (kg)	74
Armature Diameter (φ mm)	446
Armature Resonance (Hz)	1,770
Allowance Eccentric Moment (N·in)	1,550
Mass (kg)	3,500

Power Amplifier	EM6HAM-A74	EM8HAM-A74
Maximum Output (kVA)	100	
Mass (kg)	1,340	1,850

Cooling (VAPE900/N2R)		
Mass (kg)	320	
Cooling Air Flow (m ³ /min)	70	
Environmental Data		
Input Voltage Supply (3 φ, V)	380/400/415/440	
Compressed Air Supply (Mpa)	0.7	
Working Ambient Temperature	Shaker (°C)	0-40
	Amplifier (°C)	0-40

Vibration Generator (A74)

a: W 1,310 mm
b: H 1,253 mm
c: D 1,040 mm






Table Insert Pattern (unit: mm)




Amplifier

a: W 1,160 mm
b: H 1,950 mm
c: D 850 mm

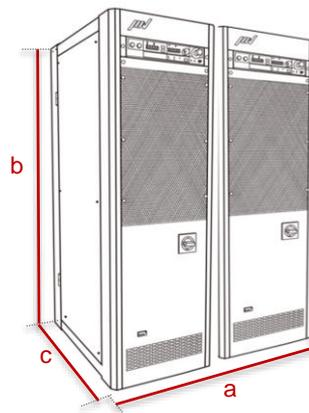

Blower

a: W 1,462 mm
b: H 2,800 mm
c: D 930 mm

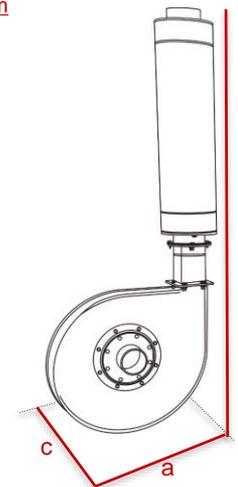

^{*1} Random force ratings are specified in accordance with ISO5344 conditions. Please contact IMV or your local distributor with specific test requirements.
^{*2} For long-duration tests, de-rating by up to 70 % must be applied. Continuous use at maximum levels may cause failure.

^{*3} Breaker capacity for 480 V.

^{*4} Above 4000 Hz, the force rolls-off at a rate of -6 dB/oct.

^{*5} Maximum velocity 4.6 m/s. High velocity restricts maximum Shock force.

^{*6} Measured 150 mm above table at full-field.

^{*} The specification shows the maximum system performance.

For long-duration tests, de-rating by up to 70 % must be applied. Continuous use at maximum levels may cause failure.

^{*} In the case of Random vibration test, please set the test definition of the peak value of acceleration waveform to be operated less than the maximum acceleration of Shock.

^{*} Frequency range values vary according to sensor and vibration controller.

^{*} Armature mass and acceleration may change when chamber is combined.